



INTERNAL CONNECTIONS

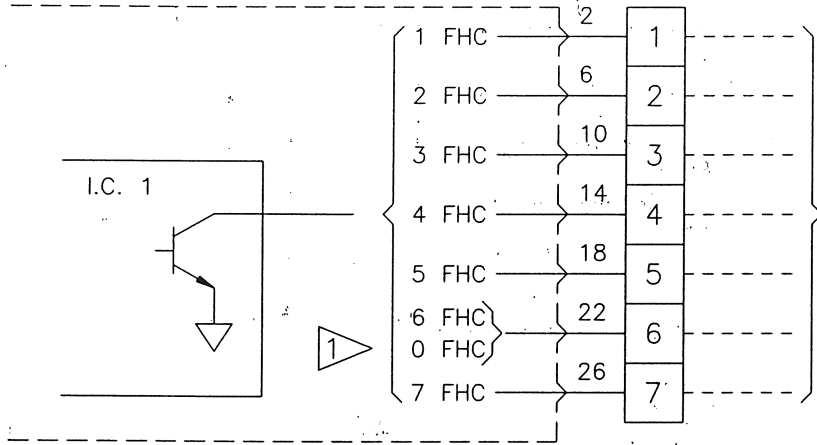

SELECT TERMINAL ACCORDING TO MODEL NUMBER OF SEQUENCE CARD

INTERNAL CONNECTIONS

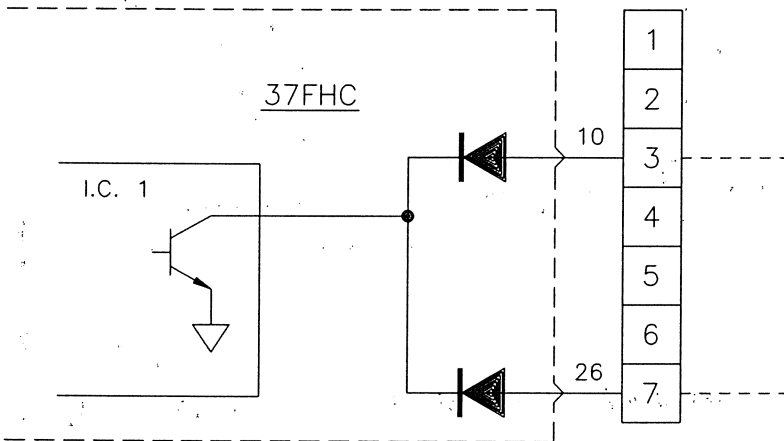

NOTE:

1. OPTION OFHC TO CUSTOMER TERMINAL 6 AND TO FH BUS.

2. FOR OUTPUT REFLASH APPLICATIONS REFER TO DWG. 90450-RFR*-1

3. OUTPUT TRANSISTOR RATINGS: 20VDC (24VDC MAX); 10mA MAX

SATURATION VOLTAGE: 2.0VDC AT 10mA

EMITTER CONNECTED TO SYSTEM COMMON 0V

4. SEE DWG. 90400-*FHC-1, INTERCONNECTION WIRING FOR INDIVIDUAL ALARM HORN ENABLE OUTPUTS.



PANALARM


1725 WESTERN DRIVE, WEST CHICAGO, IL., 60185, U.S.A.
PHONE: 1-630-231-5900 FAX: 1-630-231-4502

TOLERANCE UNLESS SPECIFIED

INCHES	MILLIMETERS
.X = .040	X.0 = 1.0
.XX = .015	0.X = 0.4
.XXX = .005	0.XX = 0.1
ANGLES ±0°30'	



THIRD ANGLE PROJECTION



REV	ECN NO.	BY	APPD	DATE	SCALE NONE	© 1992
00	11064	SM	CNL	08/12/92	DRWN BY	S.M.
01	11732	SK	CNL	03/22/96	APPD	CNL
02	11872	SK	<i>MAZ</i>	6/15/01	DATE	08/12/92
					91450-_FHC-1-02-01.dwg	
					SHEET 1 OF 1	

WIRING DIAGRAM FOR INDIVIDUAL ALARM HORN ENABLE OUTPUT



DWG. NO. 91450-*FHC-1

-A-