



REMOTE PUSHBUTTON WIRING

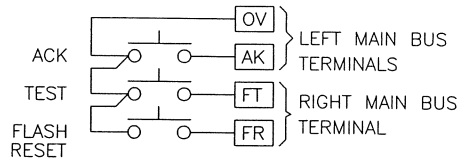

INTEGRAL PUSHBUTTON MODEL NO. 90PB32\*


NT2-24D AUDIBLE DEVICE WIRING

DIAGRAM SHOWS NOVATONE HORN WITH P1 TERMINAL BLOCK ON P.C. BOARD ATTACHED TO HORN (REF. DWG. 57100-48) FOR EARLIER VERSIONS WITH PIGTAIL LEADS, CONNECT BLACK TO OV, RED TO +24 AND BLUE TO FLASHER TERMINAL (REF. DWG. 57100-44).

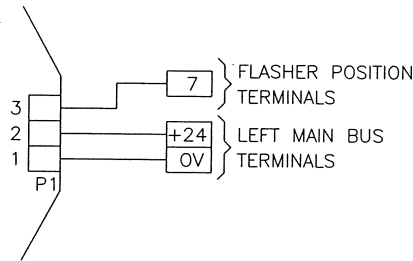


COMMON AUXILIARY RELAY WIRING

FOR CUSTOMER USE IF REQUIRED



MODEL 90AX1 (DE-ENERGIZED IN NORMAL) OR 90AX2 (ENERGIZED IN NORMAL) WITH WB-3 WIRING BOX

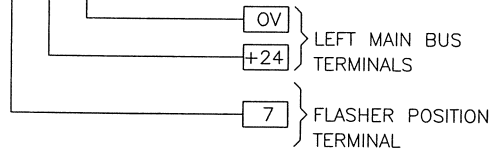

RELAY CONTACTS RATED 4 AMPS AT 250VAC OR 5 AMPS AT 28VDC OR 120VAC AND 0.5 AMP AT 125VDC RESISTIVE LOAD.

ALARM PLUG-IN CARD MODEL NO.

SINGLE POINT = 91  
TWIN POINT = 92  
TRI POINT = 93

SEQUENCE CODE \_\_\_\_\_

VARIATION \_\_\_\_\_

INPUT OPTIONS DWG. LIST, REFER TO 91900-1, 92900-1 & 93\* .

OUTPUT OPTIONS DWG. LIST, REFER TO 91900-2, 92900-2 & 93\* .

OPERATIONAL SEQUENCE "RF"

INPUT STATUS	VISUAL	AUDIBLE
ALARM OR TEST	FLASHING	ON
ACKNOWLEDGE	FLASHING	OFF
FLASH RESET	STEADY-ON	OFF
RETURN TO NORMAL	OFF	OFF

NOTES:

1. IF A NEW ALARM OCCURS WHILE TESTING, POINT WILL INDICATE ALARM CONDITION (RE-ALARM) AFTER FLASH RESET PUSHBUTTON IS OPERATED.
2. POINT WILL INDICATE ALARM WHEN TEST PUSHBUTTON IS OPERATED IF THE VISUAL INDICATOR IS OFF OR STEADY-ON.

REV	ECN NO.	BY	APPD	DATE	MATERIAL:
00	6781-04	DMW	ARF	02/18/81	FINISH:
01	6783-38	WW	RAS	10/02/81	USED ON/REF. DWG
02	8700-42	AK	JWK	05/19/83	91AF* DRAWING LIST
03	9090-13	TA	AHD	10/02/84	92AF* DRAWING LIST
04	9143-03	IR	PG	04/19/88	93* DRAWING LIST
05	7099-74	SK	PG	06/06/89	
06	10761-01	SM	PG	06/18/92	
07	11872	SK	<i>Ma</i>	6/15/01	90450-AF2-1-07-01.dwg © 1981

TOL. UNLESS SPECIFIED

INCHES  
.X = .015  
.XX = .010  
.XXX = .005

MILLIMETERS  
X.0 = 1.0  
0.X = 0.4  
0.XX = 0.1

ANGLES ±0'30'



SCALE INCH (MM)  
NTS



DWN. BY DMW/SM

APPD/DATE ARF 02/18/81

THIRD ANGLE PROJECTION



**PANALARM** 1725 WESTERN DRIVE, WEST CHICAGO, IL., 60185, U.S.A.  
PHONE: 1-630-231-5900 FAX: 1-630-231-4502

CUSTOMER WIRING DIAGRAM AND SEQUENCE 'FR' INFORMATION FOR SERIES 90

SHEET 1 OF 1

DWG. NO. 90450-AF2-1

-B-