



REMOTE PUSHBUTTON WIRING

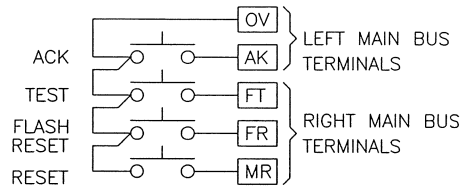


INTEGRAL PUSHBUTTON MODEL NO. 90PB41\*

COMMON AUXILIARY RELAY WIRING

FOR CUSTOMER USE IF REQUIRED





MODEL 90AX1 (DE-ENERGIZED IN NORMAL) OR 90AX2 (ENERGIZED IN NORMAL) WITH WB-3 WIRING BOX

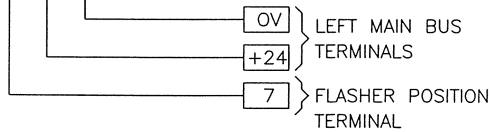

RELAY CONTACTS RATED 4 AMPS AT 250V AC OR 5 AMPS AT 28V DC OR 120V AC AND 0.5 AMP AT 125V DC RESISTIVE LOAD.

NT2-24D AUDIBLE DEVICE WIRING

DIAGRAM SHOWS NOVATONE HORN WITH P1 TERMINAL BLOCK ON P.C. BOARD ATTACHED TO HORN (REF. DWG. 57100-48) FOR EARLIER VERSIONS WITH PIGTAIL LEADS, CONNECT BLACK TO OV, RED TO +24 AND BLUE TO FLASHER TERMINAL (REF. DWG. 57100-44).

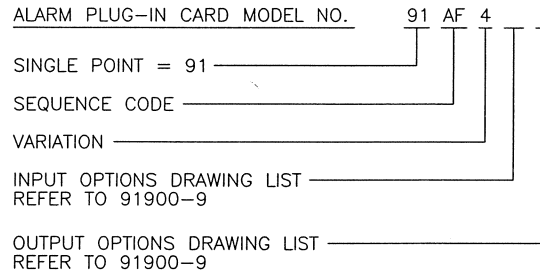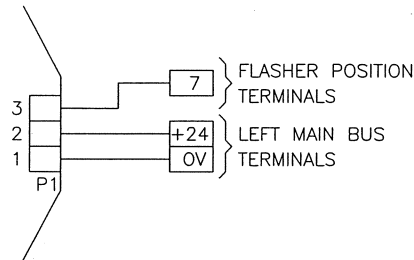

OPERATIONAL SEQUENCE "FRM"

INPUT STATUS	VISUAL	AUDIBLE
ALARM OR TEST	FLASHING	ON
ACKNOWLEDGE	FLASHING	OFF
FLASH RESET	STEADY-ON	OFF
RETURN TO NORMAL	STEADY-ON	OFF
RESET	OFF	OFF

NOTES:

- IF A NEW ALARM OCCURS WHILE TESTING, POINT WILL INDICATE ALARM CONDITION (RE-ALARM) AFTER FLASH RESET PUSHBUTTON IS OPERATED.
- POINT WILL INDICATE ALARM WHEN TEST PUSHBUTTON IS OPERATED IF THE VISUAL INDICATOR IS OFF OR STEADY-ON.

REV	ECN NO.	BY	APPD	DATE	MATERIAL:
00	7097-69B	SK	CNL	12/15/99	FINISH:
01	11872	SK	<i>Max</i>	6/15/01	USED ON/REF. DWG DESCRIPTION

TOL. UNLESS SPECIFIED  
 INCHES  
 .X = .015  
 .XX = .010  
 .XXX = .005  
 MILLIMETERS  
 X.0 = 1.0  
 X.X = 0.4  
 0.XX = 0.1  
 ANGLES ±0°30'  
 SCALE INCH (MM)  
 NONE

**PANALARM** 1725 WESTERN DRIVE, WEST CHICAGO, IL., 60185, U.S.A.  
 PHONE: 1-630-231-5900 FAX: 1-630-231-4502

CUSTOMER WIRING DIAGRAM AND SEQUENCE 'FRM' INFORMATION FOR SERIES 90 UNIVERSAL P.C.B.

DWN. BY S. KUNCA  
APPD/DATE CNL 12/15/99  
THIRD ANGLE PROJECTION

SHEET 1 OF 1      DWG. NO. 90450-AF4-2      -B-