
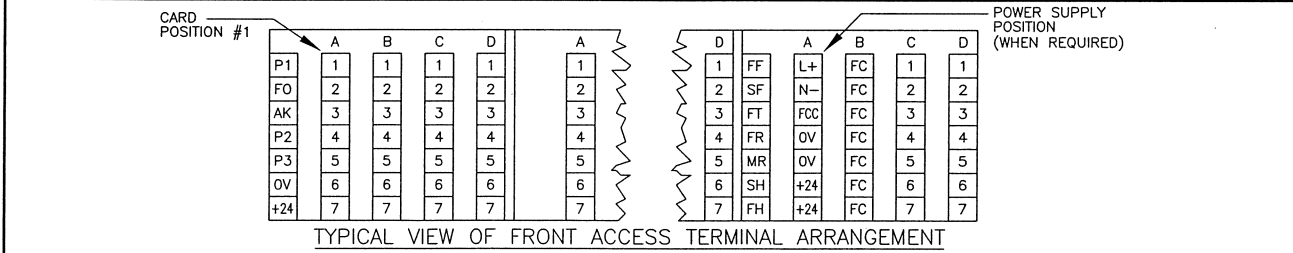
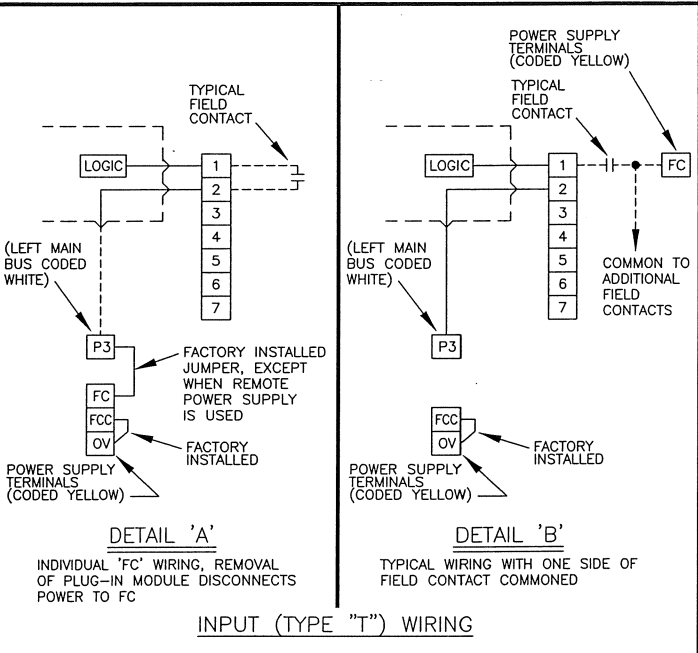


- NOTES:
- 1 NORMAL FLASHER LOCATION: LOWER RIGHT MODULE (FRONT VIEW). IN SYSTEMS WITH INTEGRAL POWER SUPPLY UNIT, NORMAL FLASHER LOCATION IS IN SLOT (D) OF ADJACENT MODULE. FLASHER CAPACITY: 300 POINTS.
 - 2 "USER" MAIN BUS BLOCKS PROVIDED ON ALL EXCEPT REMOTE LOGIC CHASSIS, ONE ROW HIGH CABINETS AND 94CA22 CABINETS. REFER TO DRAWING 90900-21.
 - 3 TOTAL CURRENT FOR COMBINED REMOTE AND INTEGRAL LAMPS NOT TO EXCEED 320mA PER POINT AT 24VDC. REMOTE LAMP OUTPUT IS NOT AVAILABLE WHEN TERMINAL "7" IS USED FOR ANOTHER FUNCTION.
 4. TYPICAL CARD WITH SWITCH FOR N.O./N.C. SW1 [] ALL GP'S POSITION
N.O. = SWITCH OPEN
N.C. = SWITCH CLOSED
 5. USE NUMBER 85 LAMP (PANALARM P/N 430039) IN LAMP BOX. NOMINAL CURRENT IS 40mA. AT 24V.
 6. DASHED LINES INDICATE CUSTOMER FIELD WIRING.

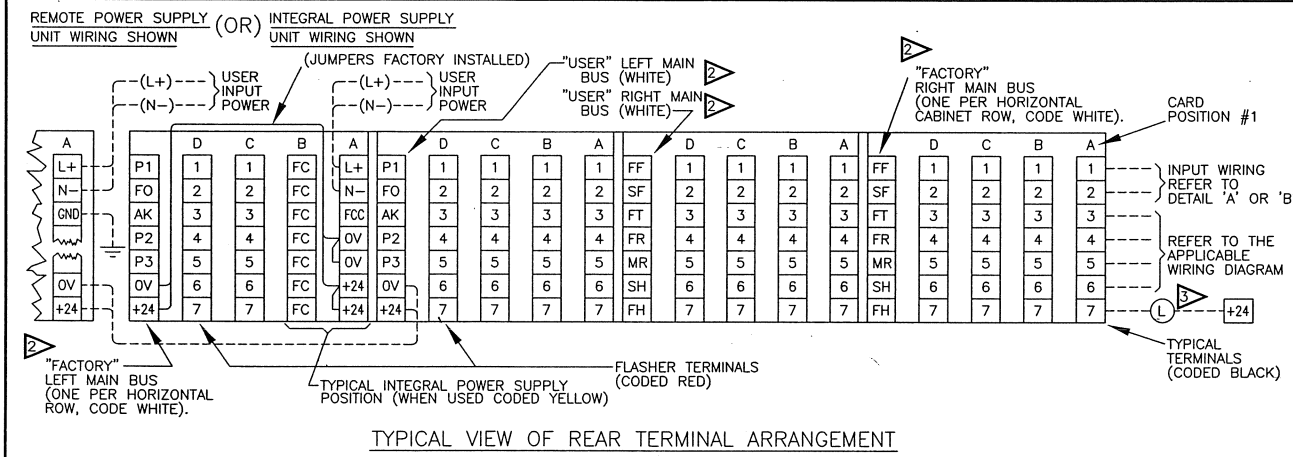

REV	ECN NO.	BY	APPD	DATE	MATERIAL:	TOL. UNLESS SPECIFIED
06	9300-41	MR	RCV	09/04/86	FINISH:	INCHES .X = .015 .XX = .010 .XXX = .005
07	9550	LJ	PG	06/04/87	USED ON/REF. DWG	DESCRIPTION
08	10390-01	SK	JT	03/12/90		
09	11872	SK	AMZ	6/15/01		
						MILLIMETERS X.0 = 1.0 0.X = 0.4 0.XX = 0.1
						ANGLES ±0°30'
						SCALE INCH (MM)
						NONE

PANALARM 1725 WESTERN DRIVE, WEST CHICAGO, IL., 60185, U.S.A.
PHONE: 1-630-231-5900 FAX: 1-630-231-4502

DWN. BY LJ / SK
APPD/DATE AFR 02/18/81
THIRD ANGLE PROJECTION

TERMINAL ARRANGEMENT OF 94 STYLE MODULE
(4 TERMINAL BLOCKS PER MODULE) (WITH 93LA LAMP BOX)
WITH (3) 91* CARDS (1 POINT PER CARD) USING TYPE "T" INPUTS

SHEET 1 OF 1 DWG. NO. 94400-13-1 -B-