



TYPICAL FRONT VIEW  
(1 HIGH X 4 WIDE MODULE ARRANGEMENT SHOWN)

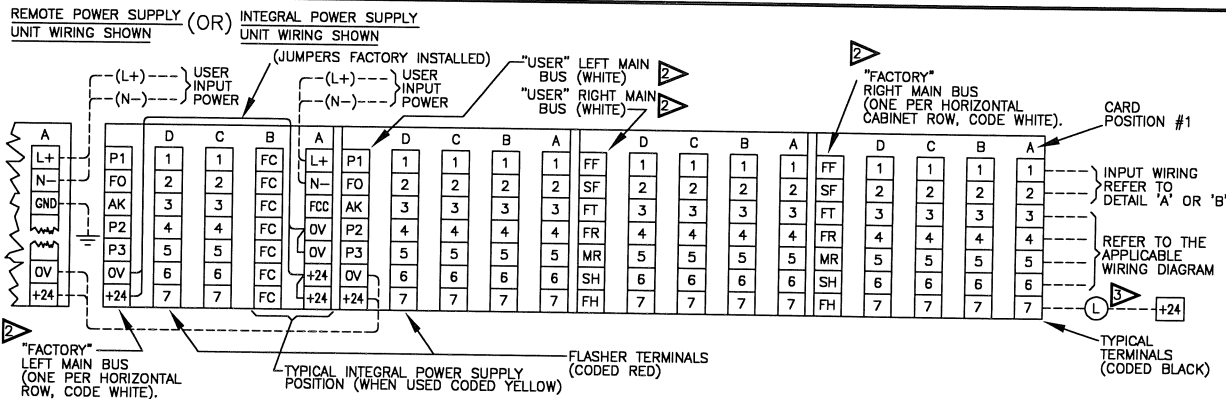

TYPICAL VIEW OF REAR TERMINAL ARRANGEMENT

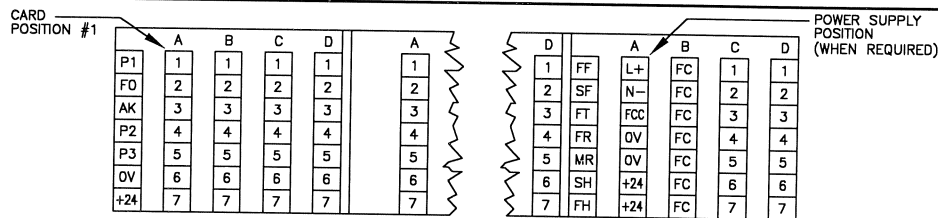

TYPICAL VIEW OF FRONT ACCESS TERMINAL ARRANGEMENT

NOTES:

- 1. NORMAL FLASHER LOCATION: LOWER RIGHT MODULE (FRONT VIEW). IN SYSTEMS WITH INTEGRAL POWER SUPPLY UNIT, NORMAL FLASHER LOCATION IS IN SLOT (D) OF ADJACENT MODULE. FLASHER CAPACITY: 300 POINTS.
- 2. "USER" MAIN BUS BLOCKS PROVIDED ON ALL EXCEPT REMOTE LOGIC CHASSIS, ONE ROW HIGH CABINETS AND 94CA22 CABINETS. REFER TO DRAWING 90900-21.
- 3. TOTAL CURRENT FOR COMBINED REMOTE AND INTEGRAL LAMPS NOT TO EXCEED 320mA PER POINT AT 24VDC. REMOTE LAMP OUTPUT IS NOT AVAILABLE WHEN TERMINAL "7" IS USED FOR ANOTHER FUNCTION.
- 4. DASHED LINES INDICATE CUSTOMER FIELD WIRING.

REV	ECN NO.	BY	APPD	DATE	MATERIAL:
03	8700-34	TA	AHD	05/23/83	FINISH:
04	9550	LJ	PG	06/04/87	USED ON/REF. DWG
05	11872	SK		/ /	DESCRIPTION

TOL. UNLESS SPECIFIED

INCHES  
.X = .015  
.XX = .010  
.XXX = .005

MILLIMETERS  
X.0 = 1.0  
0.X = 0.4  
0.XX = 0.1

ANGLES ±0°30'

SCALE INCH (MM)  
NONE

**PANALARM** 1725 WESTERN DRIVE, WEST CHICAGO, IL., 60185, U.S.A.  
PHONE: 1-630-231-5900 FAX: 1-630-231-4502

DWN. BY LJ / SK  
APPD/DATE AFR 02/18/81  
THIRD ANGLE PROJECTION

TERMINAL ARRANGMENT OF 94 STYLE MODULE  
(4 TERMINAL BLOCKS PER MODULE) (NO LAMP BOX)  
WITH 1,2,3, OR 4 91\* CARDS(S) (1 POINT PER CARD)

SHEET 1 OF 1 DWG. NO. 94400-10-2 -B-